

Here are some tips for a front row finish of your own:
 NEVER use any product that requires hardener or mixing Parts A & B unless you're a highly skilled painter and have a proper respirator. These products all tend to be heavy or toxic--or both! If you're not a pro painter, stick to lacquer and dope.

NEVER expect paint to hide a rough surface. The surface must be perfect before any dope is applied. This is covered in great detail on the PRO STUNT PRODUCTS FINISHING VIDEOS. Check these out for a complete finishing seminar on proven methods. You don't read much about finishing in magazines lately and these videos will fill in the gap.

Acrylic LACQUER is not the same as acrylic ENAMEL. Use acrylic LACQUER only!!

Buy your acrylic lacquer from any body shop supply house. They can also supply thinner, sandpaper, flex-all, fish eye killer, tape and SIKKENS M-600 cleaner. A trip there is worthwhile and probably will save you some money if you buy in quantity. REMEMBER, IT MUST BE ACRYLIC LACQUER!!

Dupont, Inmont, Ditzler, etc. are all compatible brands with SIG dope. NEVER use any Aero-Gloss products as they are not compatible or mixable with anything other than Aero-Gloss. Ask Billy Suarez about Aero-Gloss if you intend to use anything they make. He is an expert on their products.

Use only DUPONT 3608-S thinner unless you're a professional painter and have a complete working knowledge of "Hot" and "Cool" blends of thinners.


NEVER paint in high humidity. NEVER use excessive retarder.

NEVER spray over 25 P.S.I.


NEVER use a full size spray gun--use a 4 or a touch-up gun only.

ALWAYS add flex all (Dave Brown Products) and fish eye killer (Dupont) to any dope, acrylic, or combination finish.

Continued in next Newsletter From Screamin' Demon, Newsletter of the Sky Demons, Shreveport, Louisiana

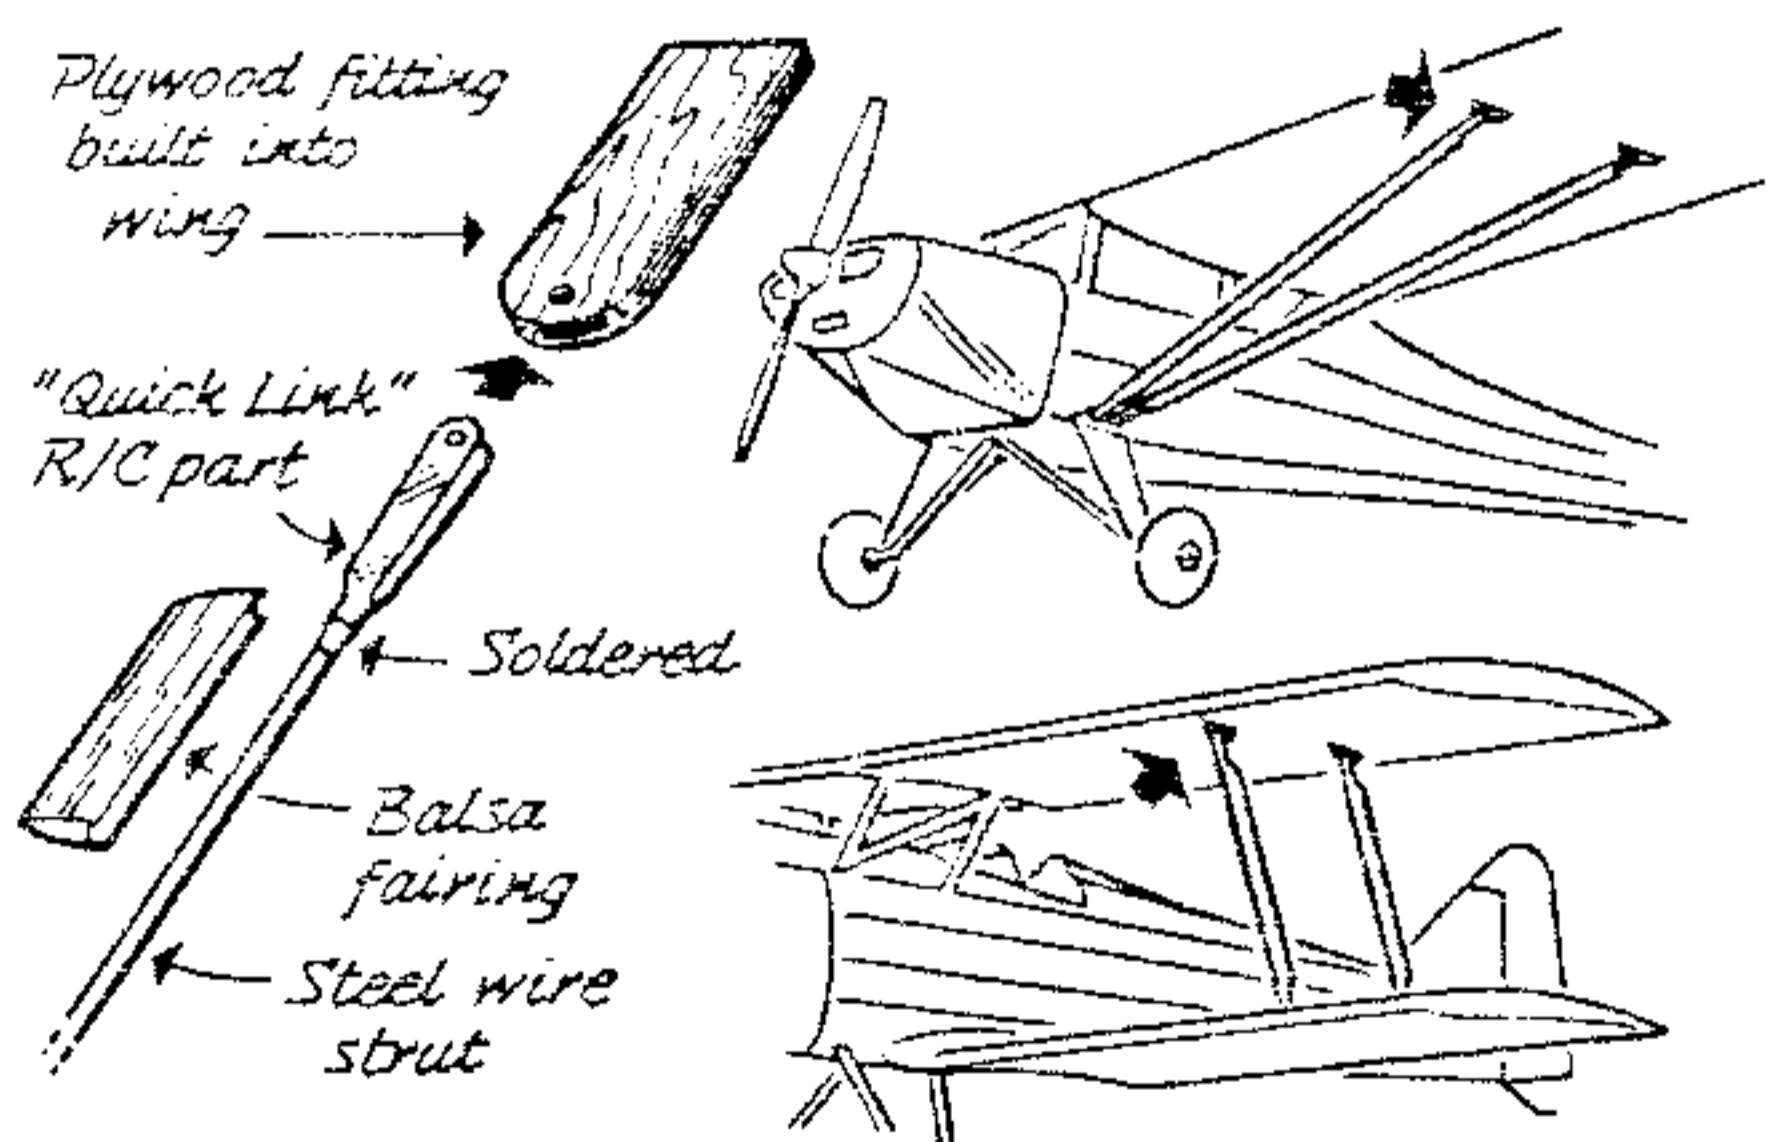

RC "Quick Links" make ideal attachment fittings for wing struts, suggests Tom Wenzel, Plainview, N. Y. Plywood mounts built into wing for easy attachment. Struts pop free in event of a crash.

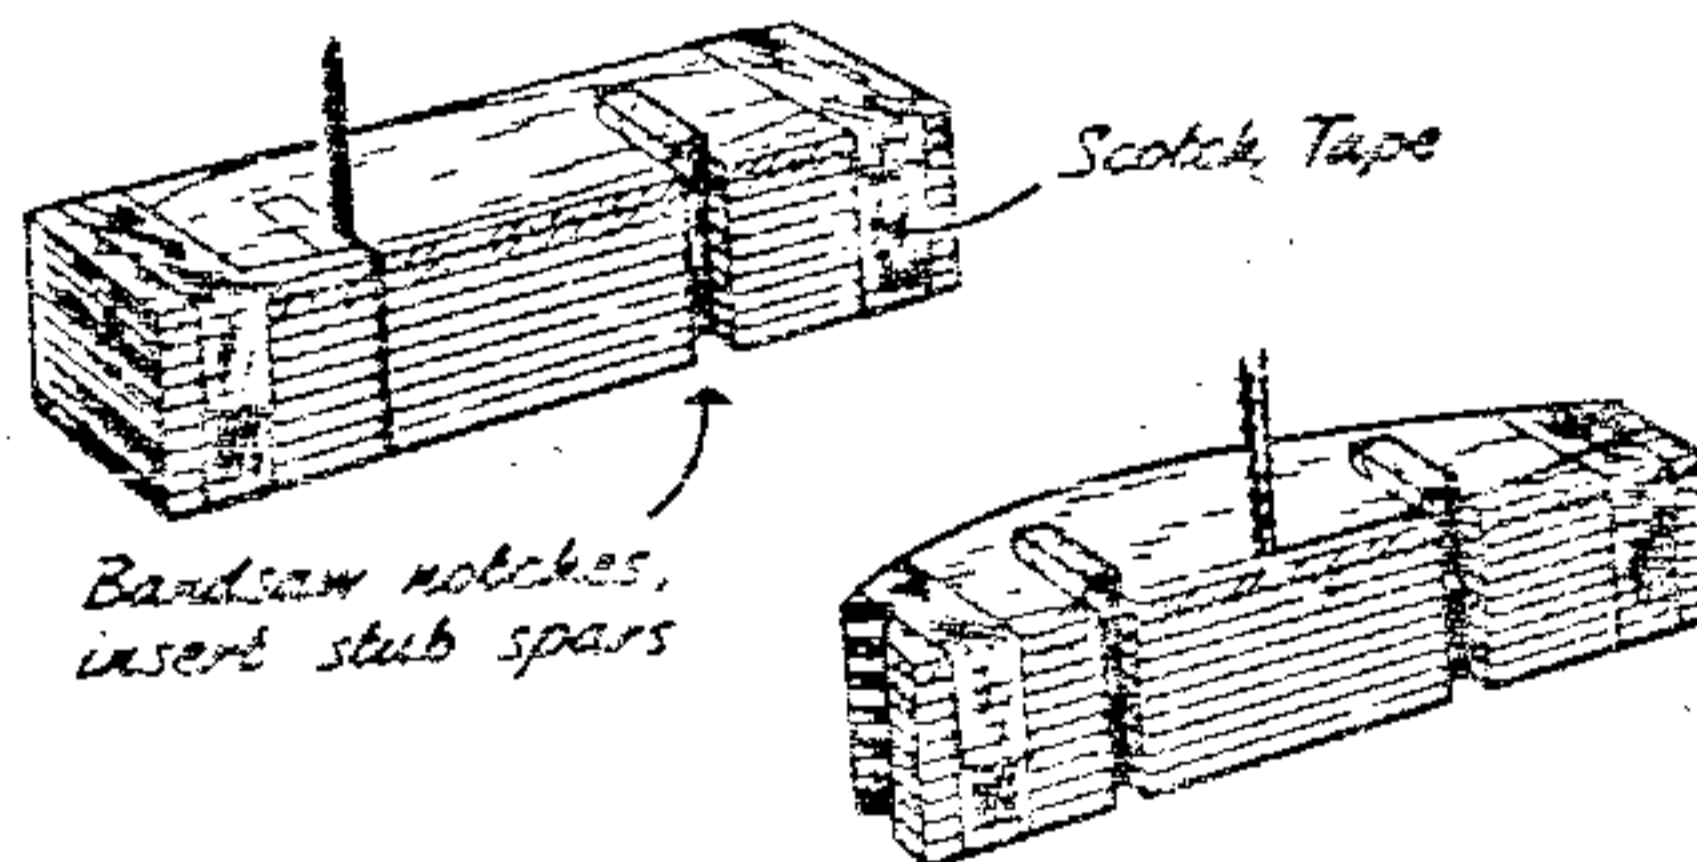

● Here's another rib-cutting scheme, this one from Don Nelson, Portland, Ore. Scotch Tape holds stack of sheets till spar slots are sawed; tight fitting stub spars hold for outline sawing.

